
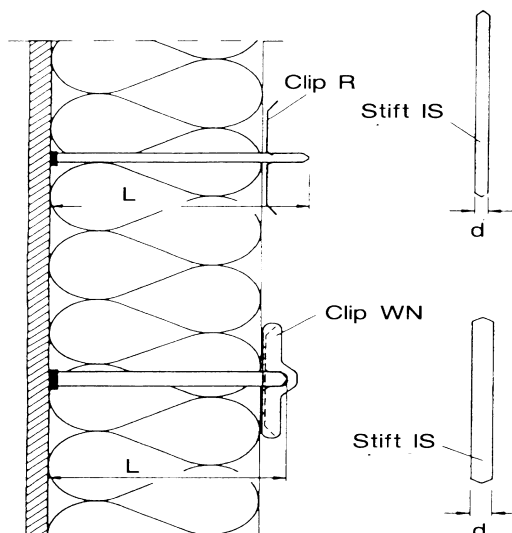



Isoleringsstifter



Isoleringspind Type IS
 Standard diameter d= 3, 4, 5 mm
 Standard materiale:
 Stål 37-3k/cu
 Chrom-nikkelstål
 A4 1.4571
 Umagnetisk 1.3952

25	60	95	130	200	300
30	65	100	135	210	350
35	70	105	140	220	400
40	75	110	160	230	450
45	80	115	165	240	500
50	85	120	170	250	600
55	90	125	180	280	800

Lagervare
 d=3 mm er
 fremhævet

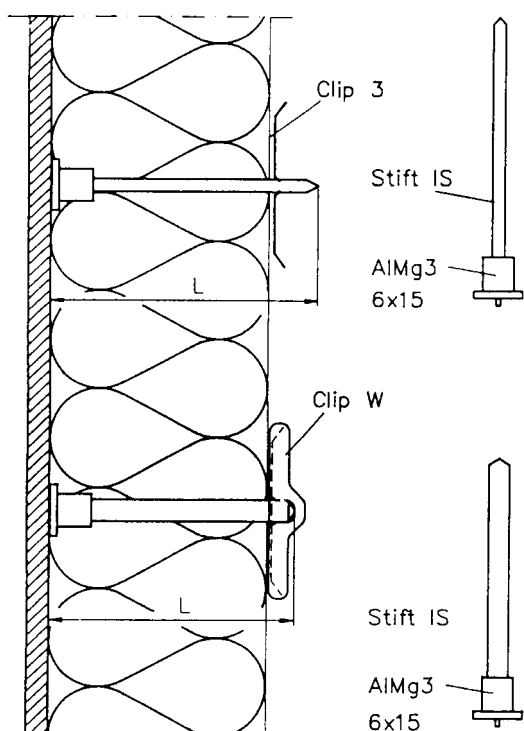

Isoleringspind Type VBS (Aluminium)
 Standard diameter d= 3, 5 mm
 Standard materiale:
 Stål 37-3k/zn
 Chrom-nikkelstål
 A4 1.4571
 Umagnetisk 1.3952

30	65	100	135
35	70	105	140
40	75	110	165
45	80	115	185
50	85	120	205
55	90	125	245
60	95	130	

Lagervare
 d=3 mm er
 fremhævet