


CLASSIC K 26



Highlights CLASSIC K 26

- + Weldable stud range 13–25 mm
- + Adjustable plunge damper
- + Resistant body
- + Designed for welding on building sites

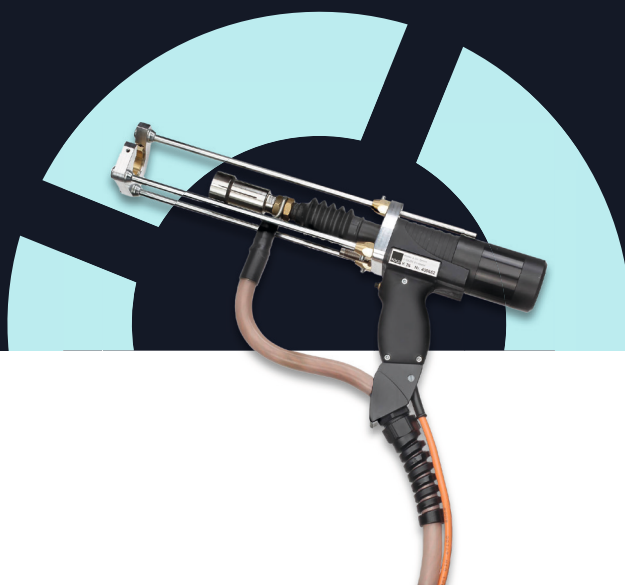

Technical data

Stud welding with ceramic ferrule, weldable stud range Ø (mm)	13–25
Standard support with ...legs	3
Lifting range from ... to ...	2,5–6
Welding cable (m/mm ²)	2/120
Control cable (m/mm ²)	2 /4 x 1,0
Length (excluding chuck) (mm)	300
Body Ø (mm)	ca. 63
Height (including handle) mm	165
Weight (approx. kg) excluding cables	ca. 2,6

Special features

- The model K 26 is a robust stud welding gun, especially for studs Ø 22–25 mm
- Ideal for welding shear connectors SD 25mm
- Ideal for through-deck-welding
- Most suitable for long shear studs
- Adjustable hydraulic plunge damper
- Standard support with 3 legs
- Body made of fibre-glass reinforced polyamide
- Compensation for stud length variations up to 8mm
- Control cable plug (4 wire)
- Optimal Integrated shielding gas device